

MX16 Easy Duo

Complete gas detection system for O₂ or CO₂



Presentation

The MX16 Easy Duo is a complete system for measuring either O₂ or CO₂ in laboratories, hospitals, universities, or industrial applications.

Features

- Large custom LCD concentration display
- Audible and visual alarms
- User-adjustable alarm levels
- Remote sensor can be placed where needed
- Interconnecting cable provided
- Simple calibration procedure




Specifications

MX16 Display & Alarm Panel

Construction	ABS Plastic
Size	265 x 266 x 96 mm (10.4 x 10.5 x 3.8 inch)
Ingress Protection	IP-55: dust-proof and water-resistant
Power Input	110-240 VAC or 24 VDC
Display	<u>Custom LCD</u> : Concentration numeric display, concentration bar graph, Gas ID and measuring units, Alarm Levels, and userprogrammed location ID
Alarms	<u>Visual</u> : 6 LEDs, Alarm 1, Alarm 2, Fault, Over-range, Under-range, Power and Alarm Reset button <u>Audible</u> : On-board piezo <u>Relays</u> : 2 Alarm and 1 Fault, Dry contact or 5 Amp @ 220 VAC / 30 VDC


Normal mode

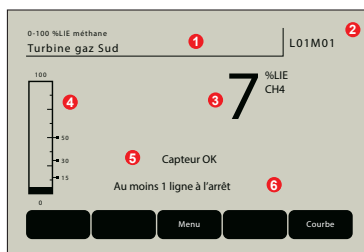

- 1 Measure Range, gas and detector tag
- 2 Detector address
- 3 Current value with unit and detected gas
- 4 Bar graph with alarm thresholds
- 5 Detector status (OK, OFF, FAULT)
- 6 MX 16 status information

Alarm mode

Grayscale mode in alarm conditions for immediate identification of the concerned detector.

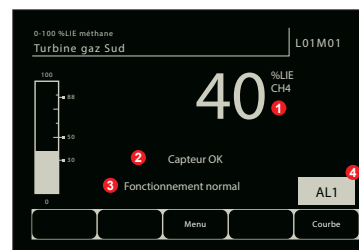

- 1 Current value with unit and detected gas
- 2 Detector status (OK, OFF, FAULT)
- 3 MX 16 status information
- 4 Detector in alarm

OLCT-10N Gas Detector

Construction	ABS Plastic
Size	118 x 110 x 60 mm (4.65 x 4.33 x 2.36 inch)
Ingress Protection	IP-65, dust-proof and water-proof

Sensor Specifications

	Oxygen (O ₂)	Carbon Dioxide (CO ₂)
Sensor Type	Electrochemical	Infrared (IR)
Measuring Range	0 to 30.0 %Vol.	0 to 5.00 %Vol.

Order Information

Part No	Description
MX16-N10000	MX-15 Easy Duo O ₂ Includes: MX16, OLCT-10N O ₂ , & 30 ft interconnecting cable
MX16-N20000	MX-15 Easy Duo CO ₂ Includes: MX16, OLCT-10N CO ₂ , & 30 ft interconnecting cable
6331163	Calibration Adaptor OLCT-10N (required for calibration)
6314208	Optional Red Strobe & Horn for MX16

Teledyne Oldham Simtronics quality assurance programmes demand the continuous assessment and improvement of all our products. Information in this leaflet could thus change without notification and does not constitute a product specification. Please contact Teledyne Oldham Simtronics or their representative if you require more details.



AMERICAS
14880 Skinner Rd
Cypress, TX 77429 USA
Tel.: +1 713-559-9200
Fax: +1 281-746-6034

EMEA
ZI Est, Rue Orfila,
CS 20417
62027 ARRAS CEDEX, France
Tel.: +33-3-21-60-80-80
Fax: +33-3-21-60-80-00

ASIA PACIFIC
Room 04, 9th Floor,
275 Ruiping Road,
Xuhui District, Shanghai
China
Tel.: +86-134 8229 5057